

OUR PRODUCTS



Sleeving

Flexible Laminates

Resin Rich Tapes

Woven Tapes

Varnish & Thinners

Cable

Rigid Laminates

Adhesive Tapes

Specialised Tapes

Other

ABOUT US

Insumat (Pty) Ltd specialises in supplying conductor, varnish and insulating materials used by the local armature winders.

Insumat is backed by over 25 years of experience selling conductor and insulating materials for various types of rotating machines.



All materials supplied by Insumat will be backed with a full specification sheet and MSDS where applicable. These specification sheets are available on request. Products sourced from overseas will have the necessary IEC, UL, ASTM or BS certification.



Through the 25 years of trading in this industry, Insumat has achieved extensive product knowledge and what materials to offer clients for best results. Insumat will procure materials locally where possible and support the countries drive to promote "local content and manufacture". Other specialised materials will be imported from reputable manufacturers around the world.



www.insumat.co.za



aubrey@insumat.co.za



061 498 2801

ACRYLIC SLEEVING

- Class F (155 Degrees)
- BDV - 2.5kV
- Sold per meter from 0.50 - 20mm in diameter
- Standard colour - yellow/black



SILICONE SLEEVING

- Class H (180 Degrees)
- BDV - 4kV
- Sold per meter from 0.5 - 20mm in diameter
- Standard colour - red/black/blue

HTG NON FRAY SLEEVING

- Temperature withstanding - 600 Degrees
- BDV - 600 volts
- Sold per meter from 1.0 - 8.0mm
- Standard colour - natural



NOMEX CABLE

- Class F (155 Degrees)
- BDV - 800 volts
- Sold per meter from 0.50 - 70mm
- Standard colour - red & white/black & white/white from 25mm and up



SILICONE CABLE

- Class H (180 Degress)
- BDV - 350/500 volts 0.5 - 6.0mm & 600 volts 10mm and up
- Sold per meter from 0.5 - 70mm
- Standard colour - red/black/blue/white/grey/brown




POLYBRAID CABLE

- Class H (180 Degrees)
- BDV - stock 1.5kV and 13.8kV
- Sold per meter from 2.5 - 95mm on 1.5kV
- Sold per meter from 25 - 95mm on 13.8kV
- Standard colour - 1.5kV is yellow/orange & 13.8kV is black



NOMEX POLYESTER NOMEX (NPN)

- Class F (155 Degrees)
- BDV - (8kv/0.15mm)(14kV/0.23mm)
(18kV/0.28mm)(19kV/0.35mm)
- Sold per meter & available in
0.15/0.20/0.23/0.28/0.35/0.41mm
- Standard colour - white with
orange/red line

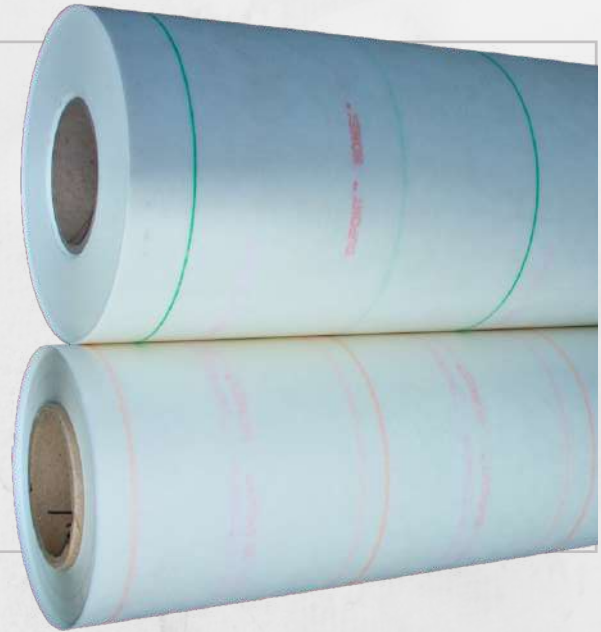

DACRON MYLAR DACRON (DMD)

- Class F (155 Degrees)
- BDV - (7kV/0.16mm)(11kV/0.23mm)
(16kV/0.28mm)(19kV/0.35mm)
- Sold per meter & available in
0.16/0.23/0.28/0.35mm
- Standard colour - white/blue/pink

PHASE INSULATION

- Class F (155 Degrees)
- BDV - 6kV
- Sold per meter & available in
0.28/0.29mm
- Standard colour - white



POLYESTER FILM

- Class E (120 Degrees)
- BDV - 20kV per mm
- Sold per kilogram & available in 0.025/0.036/0.05/0.075/0.1/0.125 0.200/0.250/0.350mm
- Standard colours - milky white/clear



NOMEX MICA NOMEX

- Class F (155 Degrees)
- BDV - varies by thickness
- Sold per sheet 900x900mm & available in 0.38/0.60/0.76mm thickness

POLYESPHAN

- Class B (130 Degrees)
- BDV - 7 Kv
- Sold per kg & available in 0.13/0.30mm
- Standard colour - green



GLASS POLYESTER (GP03)

- Class F (155 Degrees)
- BDV - 12kV per mm
- Sold per sheet 2040x1020mm & available in 0.8/1.6/3.0/5.0mm
- Standard colour - off red



EPOXY GLASS (G11)

- Class F/H (160/180 Degrees)
- Sold per sheet 2040x1020mm & available in 0.8/1.5/3.0/4.0/5.0/6.0mm
- Standard colour - green



VULCANIZED RED FIBRE

- Class B (130 Degrees)
- Sold per sheet in a 0.8/1.6/3.0mm x1100x1000mm
- Used for wedging on small mush wounds
- The red Fibre can also handle high voltage and offers 4kV per mm



SILICONE GLASS

- Class C (200 Degrees)
- BDV - varies by thickness
- Sold per sheet & available in 0.8/1.6mm
- Colour - tan



HOT MOULDING MICA (SHELLAC)

- Class F (155 Degrees)
- BDV - varies by thickness
- Sold per sheet 980x780mm in 0.25/0.76mm
- Colour - brown

COMMUTATOR MICA (SEGMENT MICA)

- Standard 0.8 and 1.0mm x 980x780mm sheets.
- Used to manufacture and repair commutators on DC machines.
- The mica can be punched or machined and used for segment mica and is mechanically very strong.



BANDING TAPE (RESI-BINDER)

- Class F/H (155/200 Degrees)
- Sold per roll in a 200m and 1500m
- Standard colour - white



RESIN RICH MICA TAPE

- Class F (155 Degrees)
- Sold per roll (0.20mmx50mmx25m)
- Standard colour - clear

ADHESIVE KAPTON TAPE

- Class F (155 Degrees)
- BDV - 6 kV
- Sold per roll in 0.065x9.5/12/19/25mm widths
- Standard colour - copper



ADHESIVE GLASS TAPE (GL95)

- Class B (130 Degrees)
- BDV - 2.5kV
- Sold per 50m roll in 18/24mm widths
- Standard colour - white

YELLOW ADHESIVE POLYESTER TAPE

- Class B (130 Degrees)
- BDV - 4.5kV
- Sold per 50m roll in 6/9/12/15/18/24mm widths
- Standard colour - yellow



CLEAR ADHESIVE POLYESTER TAPE

- Class B (130 Degrees)
- BDV - 4.5kV
- Sold per 50m roll in 12/18mm widths
- Standard colour - clear



FILAMENT TAPE

- Service temperature (80 Degrees)
- Sold per roll in 18/24/48mm
- Standard colour - clear with glass strands

MASKING TAPE

- Service temperature (80 Degrees)
- Sold per roll in 18/24/48mm
- Standard colour - yellow



OIL RESISTANT FILAMENT TAPE

- Class F (155 Degrees)
- BDV - 5kV
- Sold per roll in 12/18/24mm widths
- Standard colour - clear with glass strands

POLYESTER DYNAMO TAPE

- Class A (105 Degrees)
- Sold per 50m roll in 12/19/25/35mm widths
- Standard colour - white with red tracer line



POLYESTER WEBBING TAPE

- Class A (105 Degrees)
- Sold per 25m roll in 19/25/35mm widths
- Standard colour - white

GLASS TAPE

- Class C (200 Degrees)
- Sold per 50m roll in 12/19/25mm widths
- Standard colour - white with tracer line
- 0.09mm thick - blue tracer line
- 0.13mm thick - red tracer line
- 0.18mm thick - orange tracer line



TYING STRING

- Sold per roll in 4 & 8 strand
- 4 strand - 1000m roll
- 8 strand - 500/1000m roll
- Standard colour - white




POLYTWILL TAPE

- Manufactured with a herringbone twill weave which ensures the tape is mechanically much stronger than the typical box weave.
- Class C (200 Degrees) and provides excellent absorption qualities, shielding and armouring.



POLYESTER BACKED MICA TAPE

- Class F (155 Degrees)
- BDV - 4.5kV
- Sold per 0.13mmx25mmx50m roll on a 55mm core
- Standard colour - silver

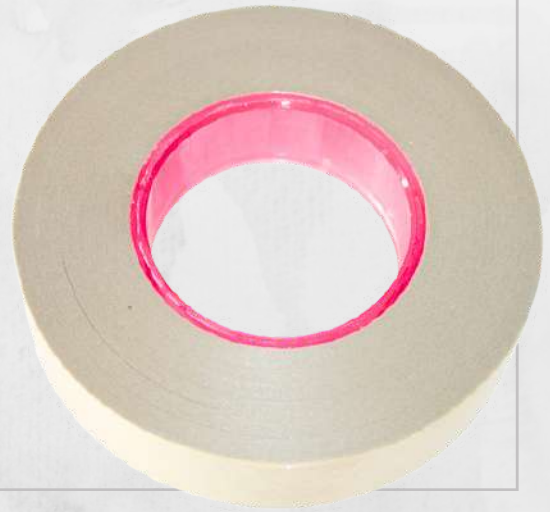

GLASS BACKED MICA TAPE

- Class F (155 Degrees)
- BDV - 2kV
- Sold per 0.15mmx25mmx50m roll on a 55mm core
- Standard colour - silver



POLYESTER GLASS MICA POLYESTER (PGMP)

- Class F (155 Degrees)
- BDV - 4.5kV
- Sold per 0.17mmx25mmx50m roll on a 55mm core
- Standard colour - silver



SEALING TAPE

- Class F (155 Degrees)
- Sold per roll 0.075mmx25mmx50m on a 40mm core
- Standard colour - red



CONDUCTIVE TAPE

- Class F (155 Degrees)
- Used in VPI/Resin Rich & Anhydride Systems
- Sold per roll 0.09mmx25mmx50m on a 40mm core
- Standard colour - black

SEMI-CONDUCTIVE TAPE

- Class F (155 Degrees)
- Used in VPI/Resin Rich & Anhydride Systems
- Sold per roll 0.20mmx25mmx50m on a 40mm core
- Standard colour - grey



NON-ADHESIVE KAPTON TAPE

- Class H (180 Degrees)
- BDV - 100HN - 7kV
200HN - 6kV
300HN - 5kV
- Sold in 12mm rolls
- Standard colour - copper



SELF-FUSING RUBBER TAPE

- Class H (180 Degrees)
- BDV - 20kV per mm
- Sold in 0.5x25mm rolls
- Standard colour - red



AIR DRYING VARNISH

- Class F (155 Degrees)
- Sold per 5L tin
- Standard colour - clear/white/red
- Imported grade



ISONEL 31 SA VARNISH

- Class H (180 Degrees)
- Sold per 5/20/200L
- Standard colour - clear
- Imported grade



XYLENE THINNERS

- Sold per 5/20/200L



DOGBONE SPACERS

- Pultruded dogbones used in dry type transformers.
- Full Class H.
- Sold in a 6x8/10x12/16x20 all by 2500mm in length.
- Sold per length and all white in colour.



WEDGES

- Insumat keeps a standard range of wedges in stock used for typical mush wound LV motor repairs.
- Thickness is 2.4x1220mm in length, thickness range from 3.5/4.5/5.5/6.7/7.5/8.5/10mm.

TOPSTICKS

- Pultruded and formed into half round wedges, these are standard stock items.
- Full Class H.
- 3x1.5/4x2/5x2.5/6x3/7x3.5/8x4 are the standard sizes kept in stock.
- They are all 1000mm in length.



MICA V RINGS

Mica V Rings can be manufactured to tailor-made requirements using the hot moulding mica that Insumat keeps in stock. The V Rings are not a stock item and only made to order. We will require either a sample or drawings for manufacture.



TEFLON SLEEVES

Insumat stocks a range of PTFE sleeves for traction motors. We keep GE761, D29, 6E, 178 (5M2) and MAMG.

Material is stored in black bags and out of direct sunlight.

GP03 SHIMS


Insumat keeps stock of GP03 Shims for Interpole and can manufacture to required size.

We keep both narrow and broad shims for 5M2 traction motors.



PLASTIC FANS

Insumat keeps a range of plastic fans ranging from D90 – D180, terminal boxes, lids and terminal blocks. Please send us any enquiries you may have.

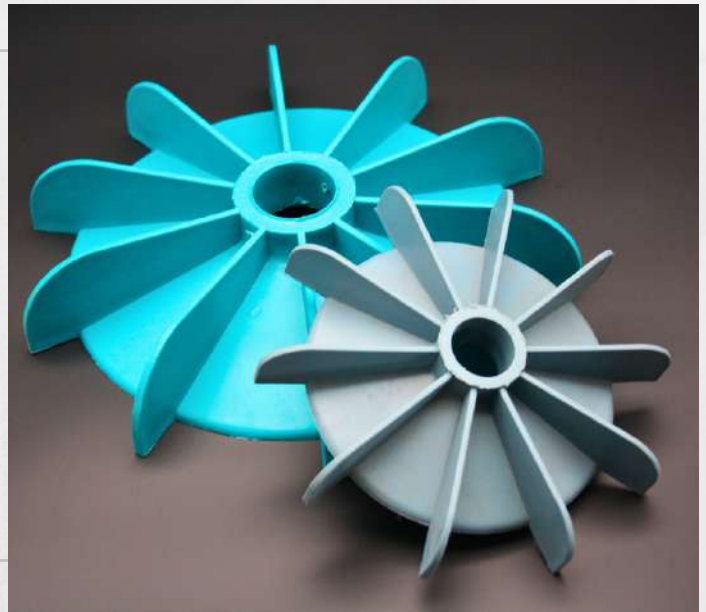

STARTING MOTOR CAPACITORS

- Capacitance 64-74uF to 500uF
- 275 VAC
- 50/60Hz

RUNNING MOTOR CAPACITORS

- Capacitance 5uF to 80uF
- 450 VAC
- 50/60Hz



CONTACT US

For more information or to place an order please contact us.




061 498 2801 (Call or WhatsApp)



aubrey@insumat.co.za



www.insumat.co.za

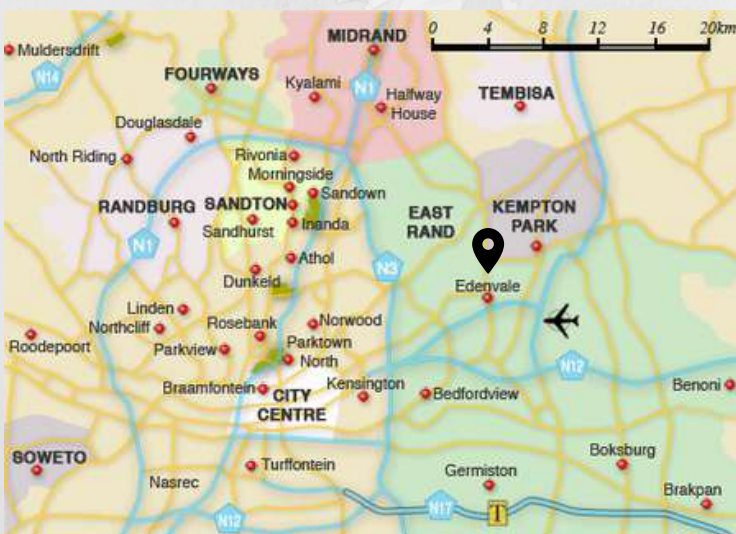

SCAN ME!



to add as contact

